

DIGGER - 1.7 T CAPACITY

Yanmar ViO17

Features

- Zero tail swing
- Tilt hitch—allows all buckets to be tilted (angled sideways)
- Sliding variable undercarriage - widen or narrow tracks to get into tight places (950—1280mm)
- Eco friendly engine - clean and silent

Diggers come standard with 3 buckets (Trenching 300mm, rock 450mm & wide 900mm bucket - all tilting)



Specifications

ViO17


Operating Weight	1,740 kg
Engine Model	3TNV70-XBV
Engine Type - 3 Cylinder Water Cooled	Diesel
Engine Output - KW	10.1 kw
Engine Output - HP	13.5 hp
Engine Output - RPM	2200 rpm
Traveling Speed - High	4.3 km/h
Traveling Speed - Low	2.1 km/h
Boom Swing Angle - Left	42 deg
Boom Swing Angle - Right	65 deg
Swing Speed	9.5 rpm
Max Digging Force - Bucket	15.2 kN
Max Digging Force - Arm	8.5 kN
Bucket Capacity, Standard (ISO heaped)	0.05 cu.m
Hydraulic System - Pump Capacity L/ Min	17.6 + 17.6 + 13.2 + 11.2
Main Hydraulic Relief Set Pressure	2987 PSI
Blade Height	235 mm
Blade Width	950/ 1280 mm
Fuel Tank Capacity	20 L

Hydraulic P.T.O.

Output	MPa <PSI>	L/ min <GPM>	
		2200 rpm	1250 rpm
Combined Flow, Double Actions	16.7 <2417>	30.8 <8.1>	17.5 <4.6>

	Digger	Auger	Trailer
Half Day Rate	POA	POA	POA
Daily Rate	POA	POA	POA
Weekly Rate	POA	POA	POA
Monthly (per week)	POA	POA	POA
Long Term Rates	POA	POA	POA

Rates based on maximum of 6h operation per day. Any time above is charged extra.

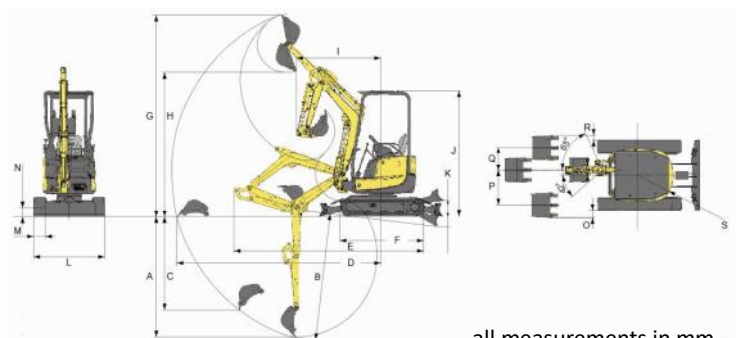

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
2200	2310	1850	3710	3450	1525	3690	2630	1535	2300	260	950 1280	230	175	125	640	400	85	R640